



EN388:16+A1:2018

SIZE: 10

IC3001



2 1 4 2 X

Product code

IC3001

Cow grain leather glove.

DPI Cat. II

Application

Excellent in the sectors: maintenance work, construction, warehouse activities, assemblies, metal carpentry, transport.

Features

Glove in full grain cowhide;
Beaded cuff;
Wrist elastic;
Abrasion resistance: Liv. 2
Cut resistance: Lev. 1
Tear Strength: Lv. 4
Puncture resistance: Liv. 2
TDM:X

Sizes

8 , 9 , 10 , 11

Standard packing

12 pairs per pack
120 pairs per carton

Marking

According to EN 388 by screen printing on the back



Product code

IC3003

Cow grain leather glove, split leather back

DPI Cat. II

Application

Excellent in the sectors: maintenance work, construction, warehouse activities, assembly, metal carpentry, transport

Features

Bovine flowering palm;
Crust back;
Beaded cuff;
Wrist elastic;
Abrasion resistance: Liv. 2
Cut resistance: Lev. 1
Tear Strength: Lv. 4
Puncture resistance: Liv. 2
TDM:X

Sizes

8, 9 , 10 , 11

Standard Packing

12 pairs per pack
120 pairs per carton

Marking

According to EN 388 by screen printing on the back



Product code

IC3000

Grain kid leather glove

DPI Cat. II

Application

Excellent in the sectors: maintenance work, construction, warehouse activities, assembly, metal carpentry, transport



Features

Kid's flower palm;
Fabric back;
Elastic cuff;
Velcro closure;
Abrasion resistance: Liv. 1
Cut resistance: Lev. 1
Tear Strength: Lv. 2
Puncture resistance: Liv. 1
TDM:X



EN388:16+A1:2018

SIZE: 10
IC3000



1 1 2 1 X

Sizes

8 , 9 , 10 , 11

Standard packing

12 pairs per pack
120 pairs per carton

Marking

According to EN 388 by screen printing on the back



Product code

IC3511

Split leather glove, red colour, 18 cm cuff

DPI Cat. II

Application

Excellent in the sectors: maintenance work, construction, warehouse activities, transport, metal carpentry, welding.

Features

Crust glove
Inner lining
18cm cuff
Abrasion resistance: Liv. 4
Cut resistance: Lev. 1
Tear Strength: Lv. 4
Puncture resistance: Liv. 4
TDM:X
Limited flame propagation: Lev. 4
Contact heat resistance: Liv. 1
Connective heat resistance: Lev. 3
Radiant heat resistance: Liv. x
Resistance to small splashes of molten metal: Liv. 4
Resistance to large splashes of molten metal: Liv. x

Sizes

10

Standard packing

12 pairs per pack
72 pairs per carton

Marking

According to EN 388 by screen printing on the back



4 1 3 1 X
IC172 SIZE: 10

Product code

IC172

Glove in polyester yarn, coated in polyurethane white, with cuff free from organic materials such as the latex rubber they are due to allergic manifestations on sensitive subjects.

The materials used do not present any dangers for the man.

DPI Cat. II

Application

Excellent in the sectors: maintenance work, construction, warehouse activities, assemblies, metal carpentry, transport

Features

Seamless knitted polyester glove, gauge 13
Coated in gray polyurethane resin on palm and fingers
Elastic knit wrist with colored lining for size
Abrasion resistance: Liv. 4
Cut resistance: Lev. 1
Tear Strength: Lv. 3
Puncture resistance: Liv. 1
TDM:X

Sizes


6 , 7 , 8 , 9 , 10 , 11

Standard packing

Individually bagged
12 pairs per pack
120 pairs per carton

Marking

According to EN 388 by screen printing on the back

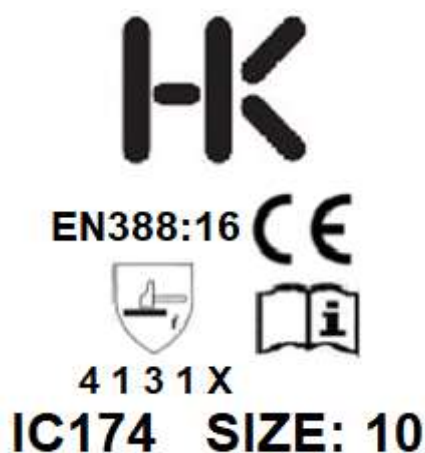

Product code

IC174

Glove in nylon yarn, coated in polyurethane gray, with cuff free from organic materials such as the latex rubber they are due to allergic manifestations on sensitive subjects. The materials used do not present dangers to humans.

DPI Cat. II

Application

Excellent in the sectors: Maintenance work, construction, warehouse activities, assembly, metallic carpentry, transport

Features

Seamless knitted polyester glove, gauge 13
Coated in gray polyurethane resin on palm and fingers
Elastic knit wrist with colored lettering for cut it
Abrasion resistance: Liv. 4
Cut resistance: Lev. 1
Tear Strength: Lv. 3
Puncture resistance: Liv. 1
TDM:X

Sizes

6 , 7 , 8 , 9 , 10 , 11

Standard packing

Individually bagged
12 pairs per pack
120 pairs per carton

Marking

According to EN 388 by screen printing on the back



Product code

IC174B

Glove in polyester yarn, coated in polyurethane black, with cuff free from organic materials such as rubber latex which are the cause of allergic manifestations on sensitive subjects.

The materials used do not present any dangers for the man.

DPI Cat. II

Application

Excellent in the sectors: maintenance work, construction, warehouse activities, assemblies, metal carpentry, transport

Features

Seamless knitted polyester glove, gauge 13
Coated in gray polyurethane resin on palm and fingers
Elastic knit wrist with colored lining for size
Abrasion resistance: Liv. 4
Cut resistance: Lev. 1
Tear Strength: Lv. 3
Puncture resistance: Liv. 1
TDM:X

Sizes

6 , 7 , 8 , 9 , 10 , 11

Standard packing

Individually bagged
12 pairs per pack
120 pairs per carton

Marking

According to EN 388 by screen printing on the back



Product code

IC173

Glove in nylon yarn, coated in gray nitrile

DPI Cat. II

Application

Excellent in the sectors: maintenance work, construction, warehouse activities, assemblies, metal carpentry, transport

Features

Seamless knitted glove in white polyester, gauge 13
Gray nitrile coating on palm and fingers
Abrasion resistance: Liv. 4
Cut resistance: Lev. 1
Tear Strength: Lv. 2
Puncture resistance: Liv. 1
TDM:X

Sizes

6 (light blue) - 7 (pink), 8 (red), 9 (yellow),
10 (brown) - 11 (blue)

Standard packing

Individually bagged
12 pairs per pack
120 pairs per carton

Marking

According to EN 388 by screen printing on the back



Product code

IC180

Glove in red nylon yarn, coated in rough black latex

DPI Cat. II

Application

Excellent in the sectors: maintenance work, construction, warehouse activities, assemblies, metal carpentry, transport.

Features

Seamless nylon knitted glove, gauge 13
Black latex coated palm and fingers
Elastic knit wrist
Abrasion resistance: Liv. 3
Cut resistance: Lev. 1
Tear Strength: Lv. 2
Puncture resistance: Liv. 1
TDM:X

Sizes

7 , 8, 9 , 10 , 11

Standard packing

Individually bagged
12 pairs per pack
120 pairs per carton

Marking

According to EN 388 by screen printing on the back



Product code

IC448

Yellow NBR glove, with ventilated back and knitted cuff

DPI Cat. II

Application

Excellent in the sectors: mechanical, industrial, construction, agriculture, sheet metal working
Excellent in contact with oils, paints and diesel

Features

Yellow NBR glove
Ventilated back
Knitted cuff
Abrasion resistance: Liv. 3
Cut resistance: Lev. 1
Tear Strength: Lv. 1
Puncture resistance: Liv. 1
TDM:X

Sizes

7 – 8 - 9 - 10 - 11

Standard packing

12 pairs per pack
120 pairs per carton

Marking

According to EN 388 by screen printing on the back



Product code

IC410

Glove in fluo yellow polyester yarn, coated in sandy black nitrile

DPI Cat. II

Application

Excellent in the sectors: maintenance work, construction, warehouse activities, assemblies, metal carpentry, transport

Features

Seamless polyester knitted glove
Coated in black sandy nitrile on palm and fingers
Elastic knit wrist
Abrasion resistance: Liv. 4
Cut resistance: Lev. 1
Tear Strength: Lv. 3
Puncture resistance: Liv. 1
TDM:X

Sizes

7 , 8, 9 , 10 , 11

Standard packing

Individually bagged
12 pairs per pack
120 pairs per carton

Marking

According to EN 388 by screen printing on the back



Product code

IC443

Blue NBR glove, ventilated back and canvas cuff.

DPI Cat. II

Application

Excellent in the sectors: mechanical, industrial, construction, agriculture, sheet metal working. Excellent in contact with oils, paints and diesel

Features

Blue NBR glove, double coated
Covered back
Canvas cuff
Abrasion resistance: Liv. 4
Cut resistance: Lev. 1
Tear Strength: Lv. 1
Puncture resistance: Liv. 1
TDM:X

Sizes

8 - 9 - 10 - 11

Standard packing

12 pairs per pack
120 pairs per carton

Marking

According to EN 388 by screen printing on the back



Product code

IC444

Blue NBR glove, with covered back and canvas cuff.

DPI Cat. II

Application

Excellent in the sectors: mechanical, industrial, construction, agriculture, sheet metal working. Excellent in contact with oils, paints and diesel

Features

Blue NBR glove, double coated
Covered back
Canvas cuff
Abrasion resistance: Liv. 4
Cut resistance: Lev. 1
Tear Strength: Lv. 1
Puncture resistance: Liv. 1
TDM:X

Sizes

8 - 9 - 10 - 11

Standard packing

12 pairs per pack
120 pairs per carton

Marking

According to EN 388 by screen printing on the back



Product code

IC100

100% continuous thread cotton glove

DPI Cat. I

Application

Excellent for handling plastic materials,
light assemblies, hobbies, gardening

Features

5 finger knit glove
Continuous thread 100% cotton
Natural cotton
100% cotton cuff with colored lining for size

Sizes

7 (red), 9 (yellow)

Standard packing

12 pairs per pack
300 pairs per carton

Marking

Internal label according to EN 420 standard



Product code

IC1915

Cut resistant glove, coated in polyurethane, gray colour.

DPI Cat. II

Application

Excellent for handling small, medium and large components in mechanical environments, assembly of very sharp parts in the automotive, electromechanical and household appliances industries.

Features

Knitted glove in synthetic fibers 13 HPPE
Very high cut resistance
Polyurethane coating
Elastic knit wrist with colored lining for size
Abrasion resistance: Liv. 4
Cut resistance: Lev. 3
Tear Strength: Lv. 4
Puncture resistance: Liv. 3
TDM: C

Sizes

6 - 7 - 8 - 9 - 10 - 11

Standard packing

Individually bagged
12 pairs per pack
120 pairs per carton

Marking

According to EN 388 by screen printing on the back



Product code

IC1916

HDPE/HPPE synthetic fiber glove, coated in polyurethane grey.

DPI Cat. II

Application

Excellent for handling small, medium and large it components in mechanical environments, assembly of very sharp parts in the automotive industry, electromechanical and household appliances.

Features

Seamless knitted glove in mixed HDPE/HPPE synthetic fibres
Very high cut resistance
Polyurethane coating
Elastic knit wrist with colored lining for size
Abrasion resistance: Liv. 4
Cut resistance: Lev. x
Tear Strength: Lv. 4
Puncture resistance: Liv. 3
TDM: F

Standard packing

Individually bagged
12 pairs per pack
120 pairs per carton

Marking

According to EN 388 by screen printing on the back



EN388:2016+A1:2018



4 X 4 2 E



GD5308 SIZE:10



Art.6908 - Fluo Yellow/Black



Art.3808 - Black/Black

Product code

GD5308

Green synthetic fiber cut resistant glove, coated in nitrile microfoam with reinforcement between index finger and thumb

DPI Cat. II

Application

Excellent for handling small, medium and large components in mechanical environments, assembly of very sharp parts in the automotive, electromechanical and household appliances industries.

Features

18 continuous thread knitted glove in synthetic fibers HPPE, steel, nylon and spandex blends

Very high cut resistance

Nitrile microfoam coating on palm and fingers

Elasticated knit wrist with ribbing colored by size

Reinforcement between forefinger and thumb

Abrasion resistance: Liv. 4

Cut resistance: Liv. x

Resistance to tearing: Liv. 4

Puncture resistance: Liv. 2

TDM: E

Standard packing

Individually bagged

12 pairs per pack



120 pairs per carton

Marking

According to EN 388 by screen printing on the back

SCAVV SRL Via Pian di Botine, 15 – 06019 Umbertide (PG) – P.IVA/C.F. 03722960543



PRODUCT CODE	PRODUCT CATEGORY	REFERENCE STANDARDS
IC8315 – S400	II	EN 166:2004 EN170: 2003
		

DESCRIPTION: Polycarbonate glasses, with adjustable temples

APPLICATIONS: The quality of the materials, and the comfort of the model, make it suitable for all sectors of the world of work



FEATURES:

- Transparent polycarbonate side protection
- Anti scratch
- Curvature: base 3
- Optical class: 1
- VLT%: 91,2
- Number of scale: 2-1,2
- Thickness (mm): 2
- Marc. Oculari: 2-1,2 U 1 F CE
- Dir. EN 166, EN170

SIZES	PACKAGING	MARKING
NESSUNA	Individually wrapped 12 per pack 360 per carton	SCREEN PRINTING ON THE TEMPLE

Via Pian di Bo ne, 15 – 06019 Umber de (PG) – P.IVA/C.F. 03722960543



PRODUCT CODE	PRODUCT CATEGORY	REFERENCE STANDARDS
IC8321 – S700	II	EN 166:2004 EN170: 2003
		

DESCRIPTION: Single-lens polycarbonate glasses, with side ventilation, excellent as overglasses

APPLICATIONS: The quality of the materials, and the comfort of the model, make it suitable for all sectors of the world of work



FEATURES:

- Transparent polycarbonate side protection
- Anti scratch
- Curvature: Base 3
- Optical class: 1
- VLT%: 91,2
- Scale Number: 2-1.2
- Thickness (mm): 2
- Marc. Oculari: 2-1,2 U 1 F CE
- Dir. EN 166, EN170

SIZES	PACKAGING	MARKING
NONE	Individually wrapped 10 per pack 300 per carton	SCREEN PRINTING ON THE TEMPLE

Via Pian di Bo ne, 15 – 06019 Umber de (PG) – P.IVA/C.F. 03722960543



PRODUCT CODE	PRODUCT CATEGORY	REFERENCE STANDARDS
IC8322-S500	II	EN 166:2004 EN170: 2003
		

DESCRIPTION: Transparent polycarbonate single-lens glasses

APPLICATIONS: The quality of the materials, and the comfort of the model, make it suitable for all sectors of the world of work



FEATURES:

- Anti scratch
- Optical Class: 2
- Filtri: 2C-1.2
- IR Protection: 5
- Thickness (mm): 1,9
- Impact resistance: F(45 m/s)
- Dir. EN 166, EN170

SIZES	PACKAGING	MARKING
NONE	Individually wrapped 12 per pack 360 per carton	SCREEN PRINTING ON THE TEMPLE

Via Pian di Bo ne, 15 – 06019 Umber de (PG) – P.IVA/C.F. 03722960543



PRODUCT CODE	PRODUCT CATEGORY	REFERENCE STANDARDS
IC433-S1551	II	EN 166:2004 – EN169:2003 EN170: 2003
		

DESCRIPTION: Single-lens goggles

APPLICATIONS: The quality of the materials, and the comfort of the model, make it suitable for all sectors of the world of work



FEATURES:

- Anti-scratch lens
- Lens with anti-fog treatment
- Stackable on prescription glasses
- Adjustable elastic band

SIZES	PACKAGING	MARKING
NONE	Individually wrapped 12 per pack 144 per box	SCREEN PRINTING ON GLASS

Via Pian di Bo ne, 15 – 06019 Umber de (PG) – P.IVA/C.F. 03722960543



PRODUCT CODE	PRODUCT CATEGORY	REFERENCE STANDARDS
IC8335B- S1100	II	EN 166:2004 EN170: 2003
		

DESCRIPTION: Polycarbonate glasses with ultra-light frame, black lens

APPLICATIONS: The quality of the materials, and the comfort of the model, make it suitable for all sectors of the world of work



FEATURES:

- Anti scratch
- Silicone nose rest
- Optical Class: 2
- Filtri: 2C-1.2
- IR Protection: 5
- Thickness (mm): 1,9
- Impact resistance: F(45 m/s)
- Dir. EN 166, EN170

SIZES	PACKAGING	MARKING
NONE	Individually wrapped 12 per pack 360 per carton	SCREEN PRINTING ON THE TEMPLE

Via Pian di Bo ne, 15 – 06019 Umber de (PG) – P.IVA/C.F. 03722960543



PRODUCT CODE	PRODUCT CATEGORY	REFERENCE STANDARDS
IC8335T- S1100	II	EN 166:2004 EN170: 2003
		

DESCRIPTION: Polycarbonate glasses with ultra-light frame, clear lens

APPLICATIONS: The quality of the materials, and the comfort of the model, make it suitable for all sectors of the world of work

FEATURES:

- Anti-scratcho
- Optical class: 1
- Thickness (mm): 2
- Dir. EN 166, EN170

SIZES	PACKAGING	MARKING
NONE	Individually wrapped 12 per pack 360 per carton	SCREEN PRINTING ON THE TEMPLE

Via Pian di Bo ne, 15 – 06019 Umber de (PG) – P.IVA/C.F. 03722960543



Product code

IC9045

Type 4, 5 and 6 stitched coverall with taped seams for chemical protection, dust protection and protection biological risk.

DPI Cat. III

Application

Suitable for all jobs where it is possible to come in contact with chemicals and toxic substances in the form of powders and liquids.

Features

Fabric weight 64 g
Taped seams
Waterproof breathable membrane
Dust-tight external seams
Hood with elastic around the face
Elastic waistband
Elastic cuff
Ankle with elastic
Covered zip with flap
Antistatic
White color

Sizes

L - XL - XXL - XXXL

Standard packing

Individually bagged
25 per pack

SCAVV S.R.L.
Art. IC9045
DPI di III ^Categoria
CE0624

EN13034/05+A1/09, EN ISO 13982-1/05
EN14605/05+A1/09, TYPE 4-5-6

EN14126:2003+AC:2004

EN 1073-2:2002 EN 1149-5:2018

Limitazioni d'uso

Tg. 2XL
Lotto n.XXX
Del.....



Product code

IC9019

Category 3 coverall, type 5b and 6b for protection against chemical agents, breathable fabric.

DPI Cat. III

Application

Suitable for all uses where it is possible to come to contact with chemicals and toxic substances below powder and liquid forms.

Features

- 64 g fabric
- Waterproof breathable membrane
- Dust-tight external seams
- Hood with elastic around the face
- Elastic waistband
- Elastic cuff
- Ankle with elastic
- Covered zip with flap
- Antistatic
- White color

Sizes

M - L - XL - XXL - XXXL

Standard packing

Individually bagged
25 per pack



Product code

IC9012

Polypropylene coverall, white colour, 30 gr

DPI Cat. I

Application

Industry, agriculture, construction, cleaning.

Features

Hood with elastic around the face
Elastic waistband
Elastic cuff
Ankle with elastic
Zip with double slider, covered with flap
White color
Weight 30 g

Sizes

L - XL - XXL - XXXL

Standard packing

50 per pack



AVEL-0016
FFP2 NR
EN149:2001+A1:2009
CE 0370

Product code

IC4402 - (AVEL-0016)

Shell filtering facepiece, FFP2 with valve

DPI Cat. II

Application

Sectors of use: Textile, pharmaceutical, ceramic, glass, construction, iron and steel, bodywork automotive, wood industry (except hardwood), industries agricultural and fruit and vegetable, welding, cutting and metal printing

Features

Shell filter facepiece
FFP2 filtering facepiece
Limits of use 12 x TLV
Valvolina
For low toxicity dusts and mists

Standard packing

10 per box
400 per carton

Marking

According to EN 149:2001+A:2009



Product code

IC4403

Shell filtering facepiece, FFP3 with valve

DPI Cat. III

Application

Sectors of use: Textile, pharmaceutical, mining, construction, steel, nuclear, waste treatment toxic, battery manufacturing, welding operation, metal cutting and printing

Features

FFP3 filtering facepiece
Shell filter facepiece
Elastics for positioning
Exhalation valve
Protection membrane for the valve
Limits of use 50 x TLV
For dust, fibres, toxic fumes

Standard packing

10 per box
200 per carton

Marking

According to EN 149:2001+A1:2009